


The smallest belt pitch with rod technology

# Micropitch

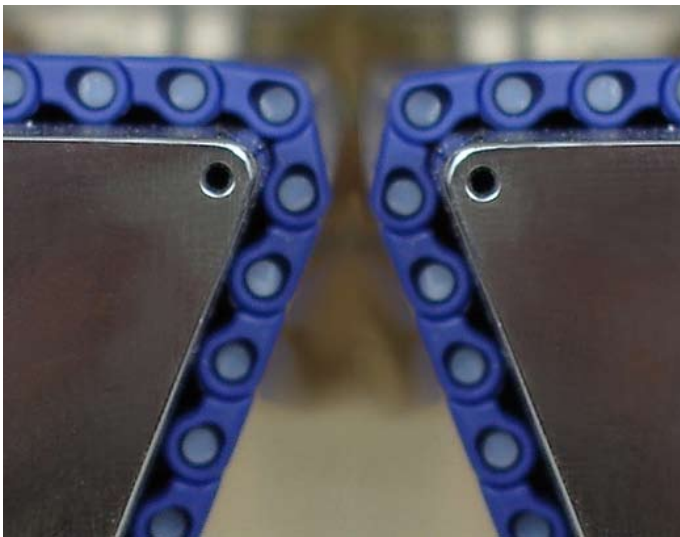

The Micropitch is a unique new belt for tightest and smoothest transfer to ensure stability of delicate and small footprint products.

## Features and benefits of M0870

### Micropitch:

- smallest possible nosebar transfer with plastic modular belts
- 0.3" belt pitch – smallest pitch with rod technology
- proper alignment of small products
- reduced product damage
- increased throughput
- elimination of tracking issues




# Micropitch – The smallest belt pitch with rod technology



Proper alignment of products can be critical at many stages of the production process. Process line stoppages created by misaligned products when feeding packaging machines often result in lower conveyor speeds to achieve proper orientation. The extremely tight transfer offered by the Micropitch ensures that product orientation is not disturbed. This results in perfectly arranged products for weigh scales, vision scanners and packaging machines. Tracking and drive issues are resolved through the positive engagement of sprockets.

## Comparison of Nosebars

Belt type	Nosebar distance Center to Center C-C		Nosebar distance End to End E-E		Nosebar radius R	
	mm	inch	mm	inch	mm	inch
0.5" pitch	39	1.54"	23	0.91"	8	0.32"
Micropitch*	21	0.83"	14	0.55"	3,5	0.14"

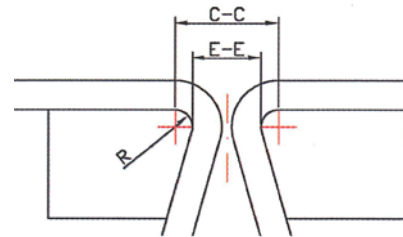

\* To ensure optimal performance use of steelnosebar is recommended

## Increased Product Stability

The Micropitch, in conjunction with nose bar diameters of 7mm (0.28"), allows spacing between transfers to be reduced to 14mm (0.55"). This achieves product stability never before possible with a conventional modular belt.

## Reduced Product Damage

Reduced transfer distances between conveyors decreases product vibration, which is what causes most product damage and downed containers.

## Increased Processing Speeds

The tight transfers possible with the Micropitch allow smooth transfers, with products maintaining proper orientation even at faster conveyor speeds.



### Headquarters

Habasit AG  
 CH-4153 Reinach-Basel  
 Phone +41 61 715 15 15  
 Fax +41 61 715 15 55  
 E-mail [info@habasit.com](mailto:info@habasit.com)  
[www.habasit.com](http://www.habasit.com)

### Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer. All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice. BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES' CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.

Registered trade marks  
 Copyright Habasit AG  
 Subject to alterations

Printed in Switzerland

Pub. Data  
 4223FLY.MOD-en1108HQR